

OPTICAL FIBER CONNECTION TRAY


BF 24 S · BF 24 C · BF 48 C



EKSELANS BY ITS



BF 24 S

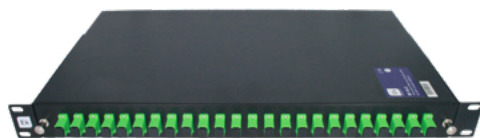

BF 24 C



BF 48 C



Metal handles
closing system
(The tray offers
strength so that
the draw does
not open easily)



Up to 4
inputs /
outputs
for fiber
hose. Max
diameter
23mm



Aramids
retaining
screw and
cassette
for fusions



Highly
stable
pull-out
tray

INCLUDED ACCESSORIES



ACCESSORIES FOR OPTICAL FIBER CONNECTION TRAY



A SCAPC S



TP AD S



T AD



TECHNICAL TABLE

REFERENCE		BF 24 S	BF 24 C	BF 48 C
Code		361011	361012	361013
Number of mounted adapters	N.	0	24	24
Type of adapters		SC - Simplex		SC - Duplex
Fibers capacity		≤24	≤24	≤48
Height	U	1	1	1
Accessories		4x Screws + nuts for rack mounting 8x Nylon ties for fiber fixing 4x Rubber caps for fiber input / output not used holes 1x Bag with 24 / 48 fusion splice heat shrink protector 1x Support/Cassette for fusion holder		
Dimensions (WxDxH)	mm	483 x 240 x 44		

TECHNICAL TABLE OF ACCESSORIES

CODE	A SCAPC S	T AD	TP AD S
Reference	363001	363010	363011
Description	Adapter for BF 24 S fusion tray / Fiber terminal boxes	Screw for SC/APC adapter fixing	Cap for BF 24 S fiber tray. SC/APC simplex size
Packaging	50/2000	48	100